


CIRCUIT DIAGRAM FOR COBRA 148GTL-DX (Early)

PC-879

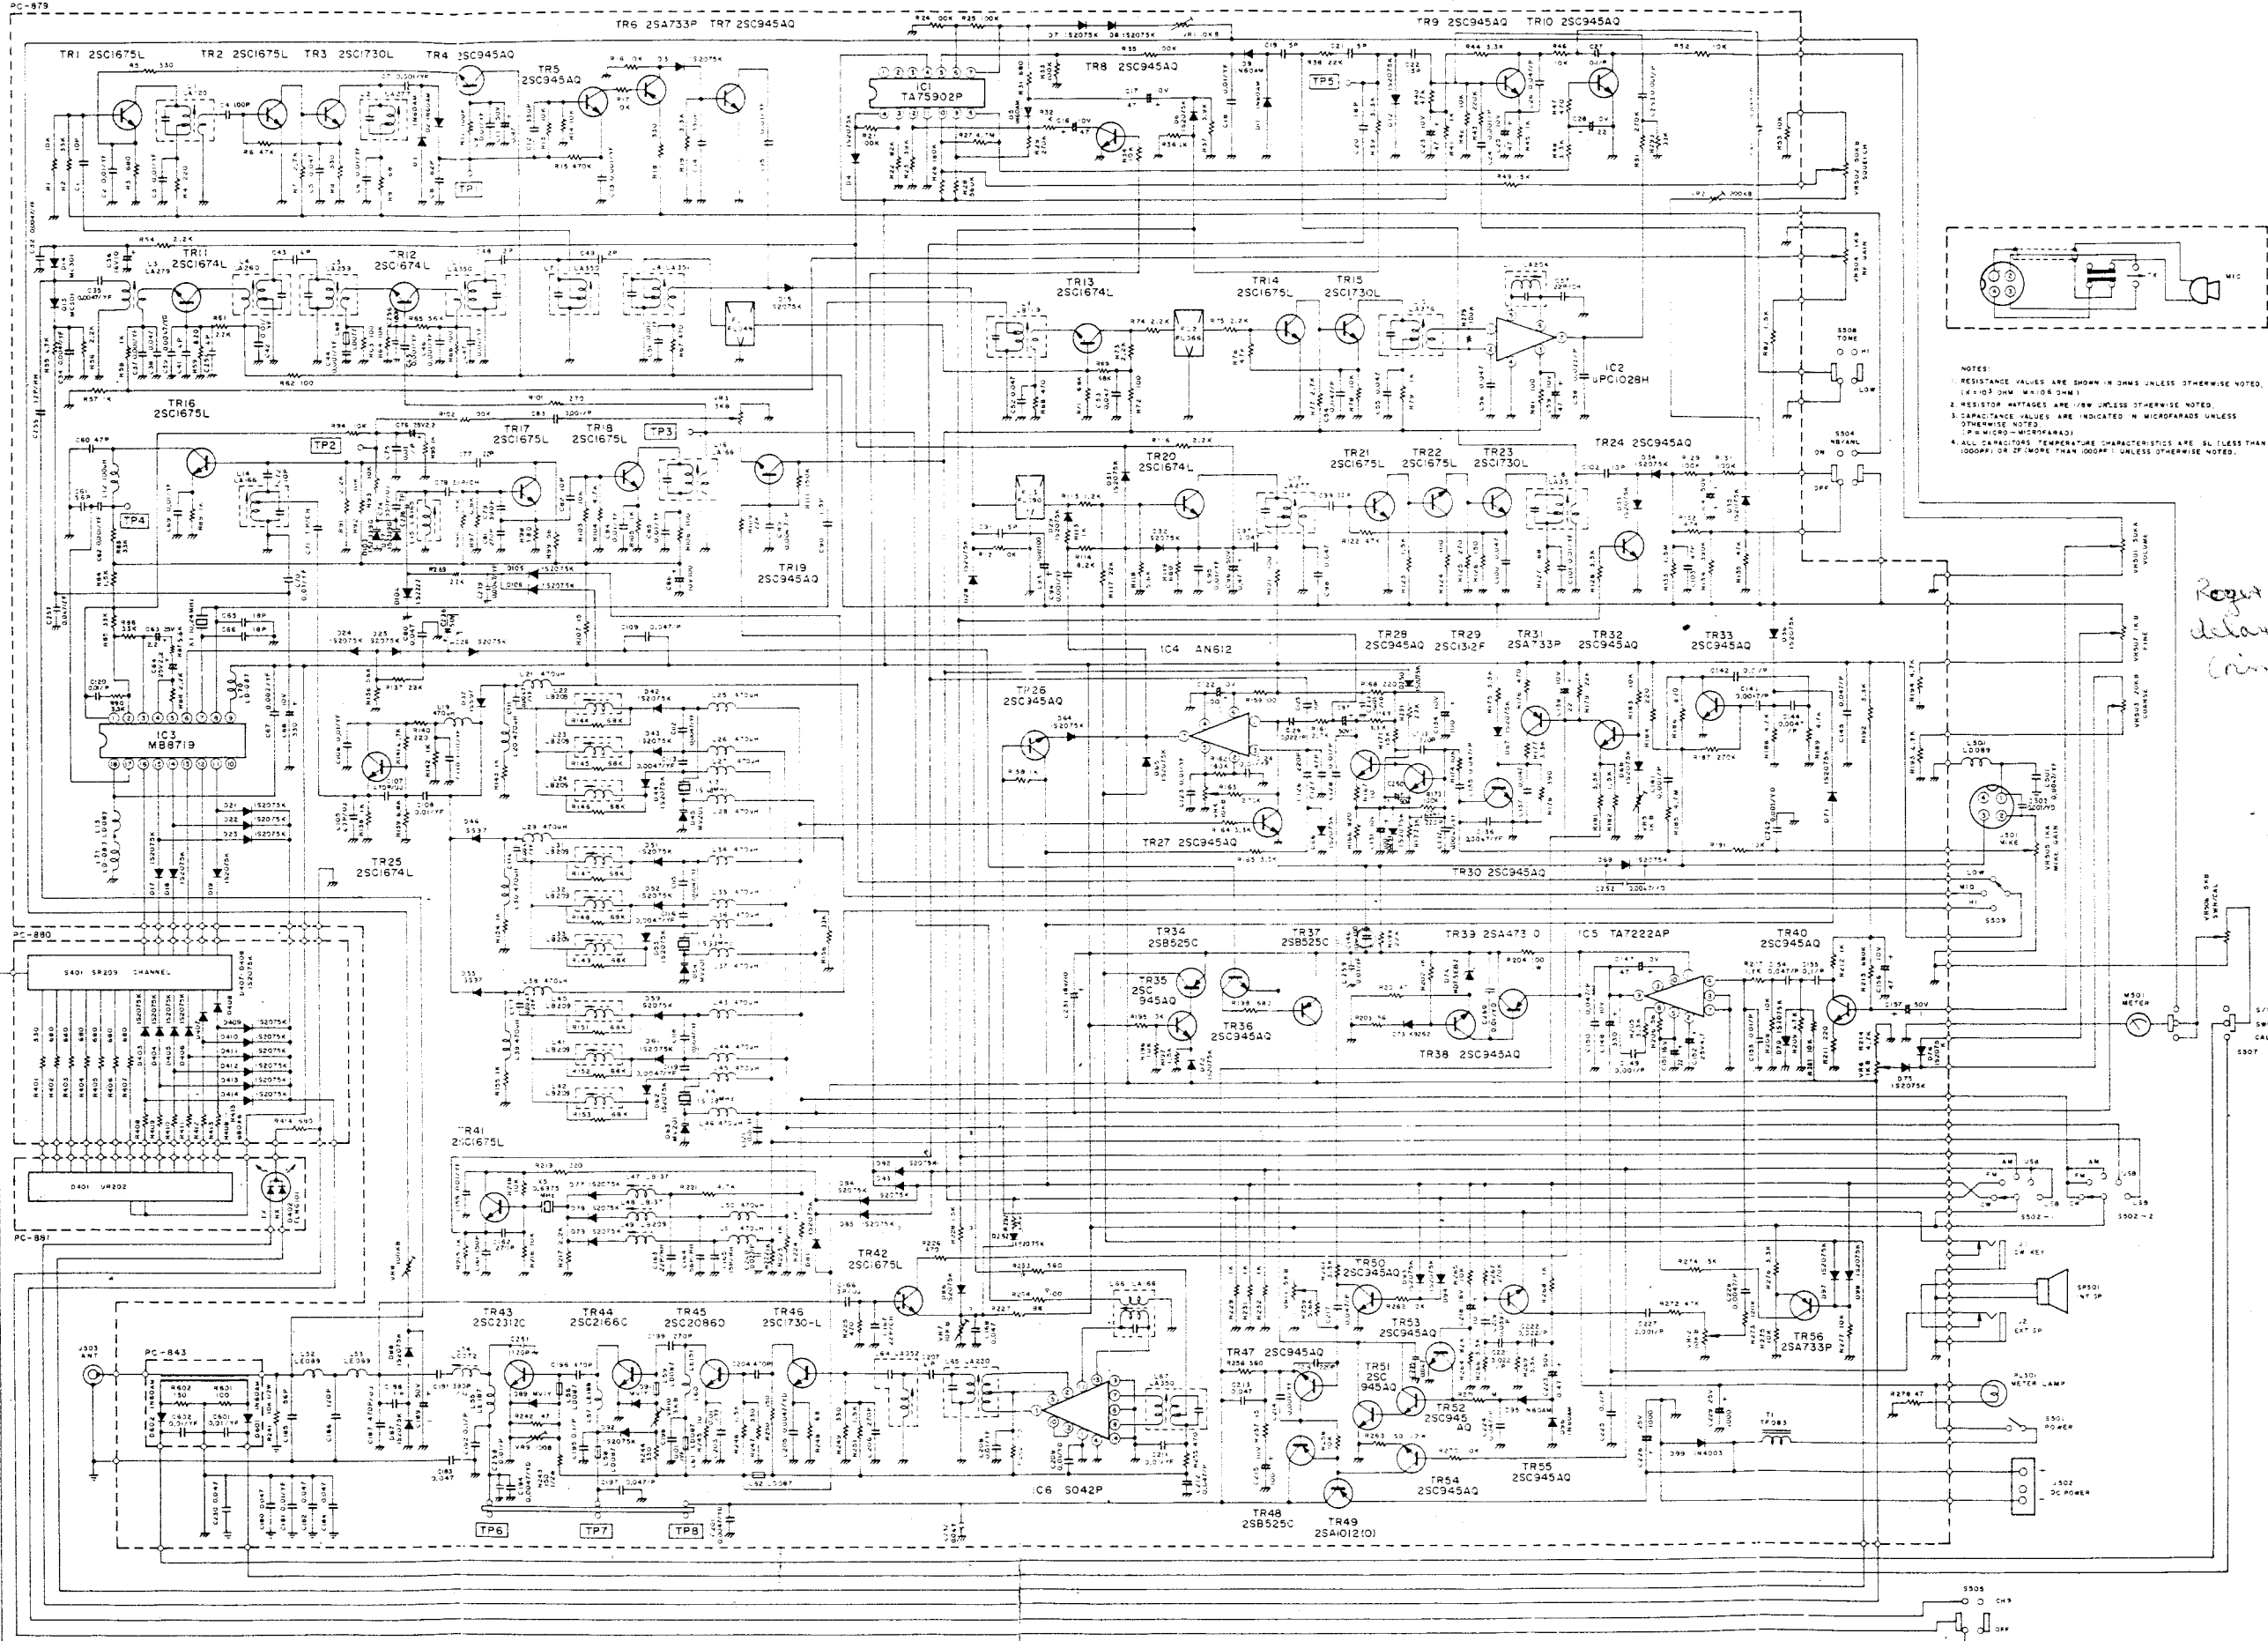

NOTES:
 1. RESISTANCE VALUES ARE SHOWN IN OHMS UNLESS OTHERWISE NOTED.
 (K = 10³ OHMS, M = 10⁶ OHMS)
 2. RESISTOR RATINGS ARE SHOWN UNLESS OTHERWISE NOTED.
 3. CAPACITANCE VALUES ARE INDICATED IN MICROFARADS UNLESS OTHERWISE NOTED.
 (P = MICRO-MICROFARAD)
 4. ALL CAPACITORS' TEMPERATURE CHARACTERISTICS ARE 5% LESS THAN 100PPM/°C IF MORE THAN 100PPM/°C UNLESS OTHERWISE NOTED.

Regen loop delay is 0.46 (msec)

5505
 5507